



DOWNHIL 850



MACHINE DESCRIPTION:

A great choice for tractors up to 150 hp.

High performance from light to medium soils without stones.


This type of mounted plough helps to intensive ploughing on small and mid-sized farms.

STANDARD EQUIPMENT:

- mouldboard model: KV09, LM35, LM40
- hydraulic cylinder with automated unit for turning
- support wheel (ø 560×175)
- fork hinge cat. 2
- protection by bolt
- divisible flange

ABOVE-STANDARD EQUIPMENT:

- slatted boards PS40
- trashboard
- extension wing
- skimmers
- rolling coulter ø 480
- knife coulter
- sword landsides
- mechanical arm of soil compress
- adapter for the plough
- support wheel TR 315 (ø 590×255)

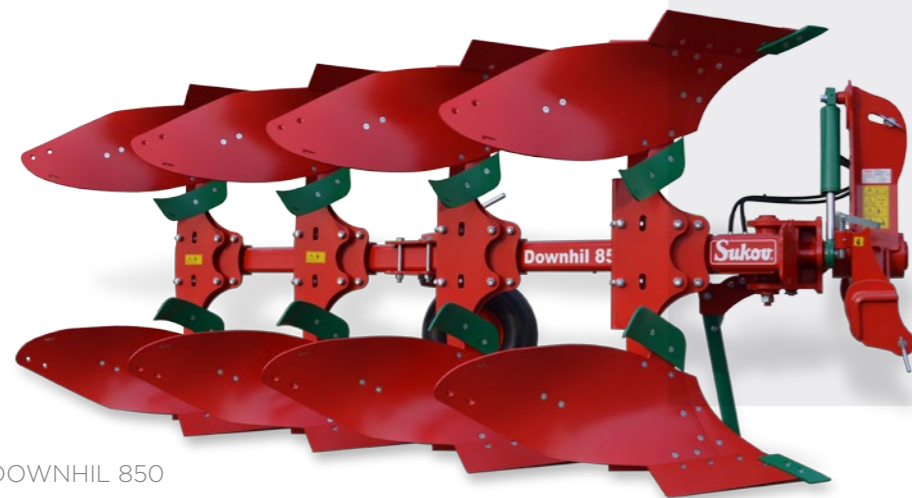

DOWNHIL 850



TECHNICAL DATA:

| Number of furrows | Unit | 2+ | 2+1 | 3+ | 3+1 |
|-------------------------------|------|------------|-----|--------|---------|
| Weight of plough Downhil 850* | kg | 760 | 960 | 963 | 1 170 |
| Power requirement | hp | 60-80 | | 80-100 | 100-160 |
| Working width | cm | 30-35-40 | | | |
| Frame | mm | 120x120x10 | | | |
| Interbody distance | mm | 850 | | | |
| Under beam clearance | mm | 750 | | | |

* stated plough weights without accessories