



JUNIOR ROTO

JUNIOR ROTO - SPRING



MACHINE DESCRIPTION:

This type of reversible mounted plough help to ploughing on small and mid-sized farms.

The construction of plough **JUNIOR ROTO** reduces running costs for farmers.

Lightweight, robust, easy to use and adjustable plough.

Suitable for ploughing to a depth of up to 25cm.

Main advantage of **SPRING** protection is that ploughing bodies are secured by 7 leaf springs.



Maintenance-free non-stop protection **SPRING** guarantees uninterrupted ploughing after hitting stones.

STANDARD EQUIPMENT:

- mouldboard model: JR30
- trashboard
- extension wing
- hydraulic cylinder with automated unit for turning
- support wheel (ø 560×175)
- fork hinge cat. 2
- protection by bolt or non-stop leaf spring
- divisible flange

ABOVE-STANDARD EQUIPMENT:

- skimmer
- rolling coulter ø 480
- knife coulter
- mechanical arm of soil compress
- support wheel TR 315 (ø 590×255)
- front furrow adjustment
- adapter for the plough

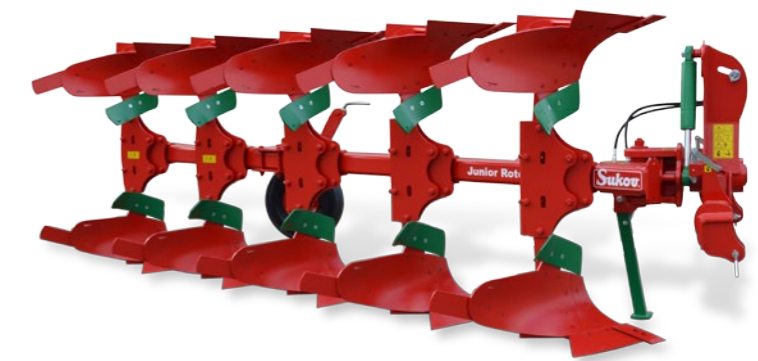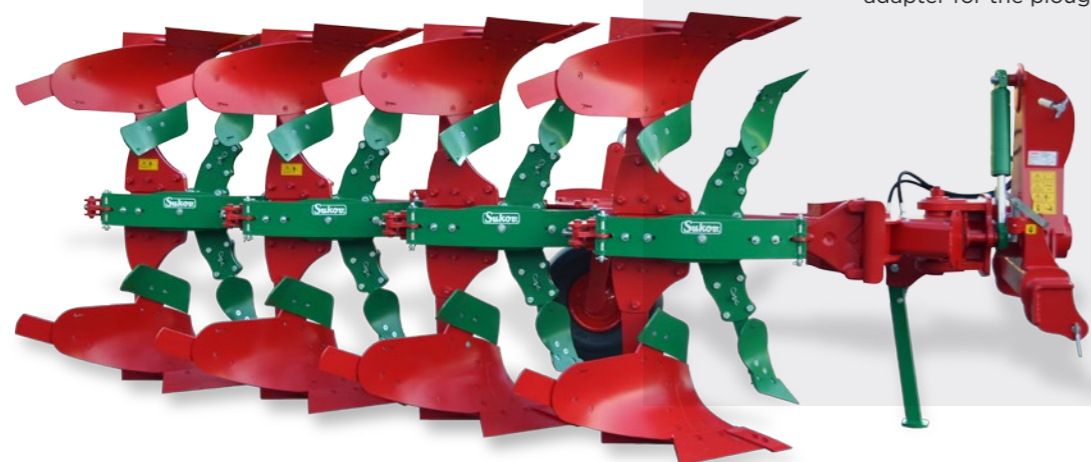

TECHNICAL DATA:

Number of furrows	Unit	2+	2+1	3+	3+1	4+	4+1
Weight of plough Junior Roto*	kg	714	863	1 002	1 010	1 146	
Weight of plough Junior Roto-Spring*	kg	854	1 068	1 072	1 290		
Working width	hp	60-80	70-90	90-120	90-150		
Working width	cm	30 - 35 - 40					
Frame	mm	120x120x10					
Interbody distance	mm	850					
Under beam clearance	mm	750					

* stated plough weights without accessories