



SKR ROTO

SKR ROTO - SPRING

MACHINE DESCRIPTION:

This type of mounted plough helps to intensive ploughing on small and mid-sized farms.

The construction of plough **SKR ROTO** reduces running costs for farmers.

Lightweight, robust, easy to use and adjustable plough.

Suitable for ploughing to a depth of up to 30 cm.

Main advantage of **SPRING** protection is that ploughing bodies are secured by 7 leaf springs.

Maintenance-free non-stop protection **SPRING** guarantees uninterrupted ploughing after hitting stones.




STANDARD EQUIPMENT:

- mouldboard model: SR30
- trashboard
- extension wing
- hydraulic cylinder with automated unit for turning
- support wheel (ø 560x175)
- fork hinge cat. 2
- protection by bolt or non-stop leaf spring
- divisible flange

ABOVE-STANDARD EQUIPMENT:

- skimmer
- rolling coulter ø 480
- knife coulter
- mechanical arm of soil compress
- adapter for the plough
- support wheel TR 315 (ø 590x255)
- front furrow adjustment

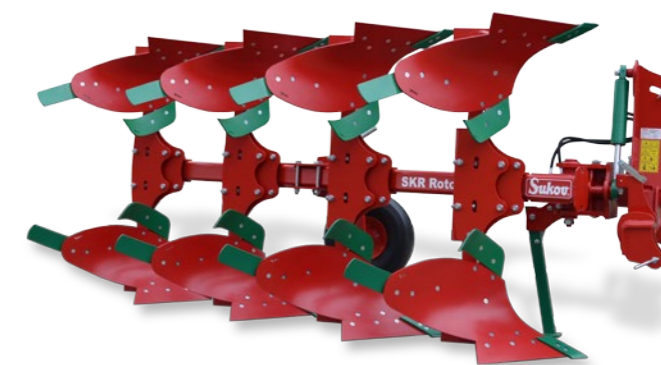

TECHNICAL DATA:

Number of furrows	Unit	2+	2+1	3+	3+1	4+	4+1
Weight of plough SKR Roto*	kg	714	858	863	1 002	1 010	1 160
Weight of plough SKR Roto -Spring*	kg	840	1 080	1 083	1 330		
Working width	hp	60-80		70-90	90-120	90-150	
Working width	cm	30-35-40					
Frame	mm	120x120x10					
Interbody distance	mm	850					
Under beam clearance	mm	750					

* stated plough weights without accessories