
Self-loading Z577 bale wrapper with side loading



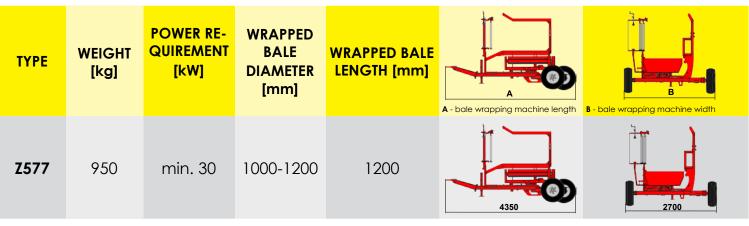

The L-02 wrap counter is an electronic device used for counting wraps on a bale.

Universal 500 mm and 750 mm film feeder.

Loading arm working width adjustment.



The bale wrapper is equipped with hydraulic control (with the distributor with levers located in the tractor cabin).

Connected to the tractor using the top or bottom hitch.

Easy to use mechanical parking jack.



The front platform - facilitates safe servicing.

Four rotary shafts. The ribs on the bale wrapper drums improve their durability and prevent sliding of the bale.

Film cutting mechanism.

Side

cones.





Optional bale positioning device.





Transport wheel position.







Item	Туре	Z557	
	Bale characteristics		
1	Wrapped bale diameter [mm]	1000-1200	
2	Wrapped bale length	1200	
3	Maximum bale weight [kg]	800	
4	Bale wrapping time [min]	approx. 1.3/2	
5	Film width [mm]	500/750	
	Machine characteristics		
6	Number of table revolutions while using 500 mm / 750 mm film [revolutions]	24/16	
7	Bale loading method	automatic, with loading arm	
8	Bale unloading method	automatic with a lifting frame	
9	Machine drive	hydraulic	
10	Wheel track [mm]	2030	
11	Wheel size	10.0/80-12.10 PR	
12	Tyre pressure [bar]	3.5	
	Overall dimensions		
13	Weight [kg]	950	
14	Length [mm]	4350	
15	Width [mm]	2450	
16	Height [mm]	2380	
	Tractor requirements		
17	Method of coupling to a tractor	mounted	
18	Coupling to a tractor by	tractor upper (transport) or lower (agricultural) hitch	
19	Tractor power [kW]	min. 30	
20	Recommended tractor pump output [I/min]	22	
21	Required pressure in the tractor power hydraulic system [MPa]	14	
22	Maximum transport speed [km/h]	15	
	Electrical System		
23	Machine lighting	optional, in accordance with the requirements of the traffic code	
24	Electrical system voltage [V]	12 t	
	Optional equipment		
25	Automatic film cutter	V	
26	Wrapping film feeder	V	
27	Wrap counter	V	
28	Parking jack	V	
29	Transport wheel position	V	
30	Mechanical bale positioning device	•	

Key: V standard

optional